


NEOS III

Logos Imaging's NEOS III is a small format DR imaging system designed to withstand the rigors of harsh environments. The imager housing is cast Mg and includes shielding to allow use with higher X-ray energies. The design of the NEOS III provides shock, vibration, and water ingress protection giving users unparalleled confidence in the system's performance wherever the job site is located. The system also offers the advantages of built in wireless communications and a removable battery that provides two hours of operation for situations where ultra-portability and short-range communications are desirable.

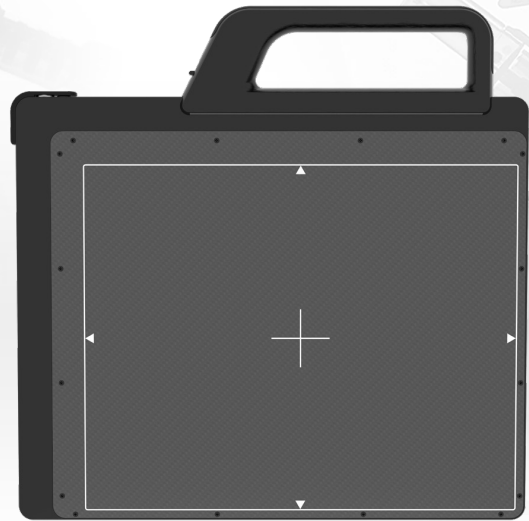

NEOS III DR System

Ideally suited for dismounted operations, the NEOS III full wireless system in a backpack configuration weighs under 22 lb (10 kg). With a built in battery and internal wireless communication, the NEOS III is perfect for users that want to quickly assess an item. At 3.3 kg and only 18 mm thin, the NEOS III can be easily transported on target with minimal effort. The NEOS III produces high resolution 16-bit images and is shielded for up to 330 kV sources.

In environments where wireless communication is acceptable, the entire imaging system consists of only a flat panel detector, an operating PC, LIA Security software, carrying case and a Golden Engineering Source. In full wireless mode, the NEOS III can operate for up to two hours on a single battery charge. The system includes two batteries for a total of up to four hours of

operation on a single battery charge (additional batteries can be purchased to extend run time). Batteries are easily changed in the field and are charged with the supplied dual battery charger.

With a wireless range of 50 m* users can work safely in almost any environment. When longer battery life and extended wireless range or wired operation are required, the ASÝRMATOS II interface provides up to seven hours of additional battery life (the system can also be operated continuously when mains power is available at the PC workstation), and 400 m* wireless range or up to 200 m wired range.

* Line of Sight

Features

- *Wired and Wireless Panel Operation*
- *8 mm Bottom Border*
- *High Resolution and Sensitivity, 127 µm Pixel Size, 3.9 lp/mm*
- *Multiple Scintillator Options*

PEO B.V.

info@gotopeo.com
www.gotopeo.com

The Netherlands

Havenweg 16, 6603 AS Wijchen
+31 (0)24 648 86 88

Belgium

Watermolenstraat 2, B-2910 Essen
+32 (0)3 309 32 09

CoC 34107894

VAT NL807859151B01

IBAN NL29 RABO 0356 1960 46


BIC RABONL2U





Common Applications for the NEOS III DR System:

- EOD/IEDD
- Forensics
- Customs
- Border Protection
- Event Security

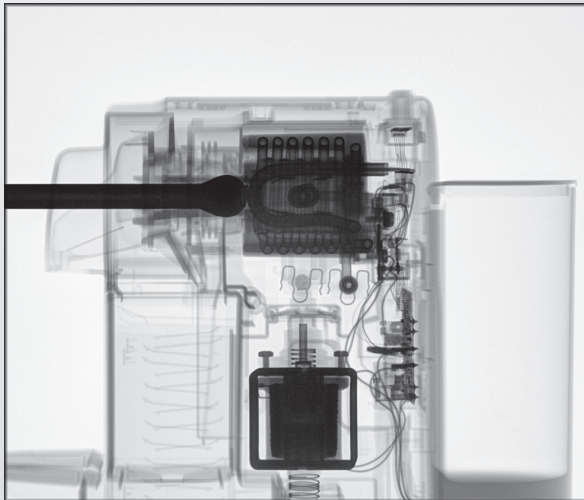

A full NEOS III system in lightweight, backpack configuration weighs under 22 lb (10 kg).

Specifications

NEOS III DR SYSTEM

Technology	Amorphous Silicon with TFT
Scintillator	Gadox
Pixel Area	12.8" x 10.2", 32.5 x 26.0 cm
Pixel Matrix	2560 x 2048 pixels
Pixel Size	127 µm
Limiting Resolution	3.9 lp/mm
AD Conversion	16 bits
Communications Interface	Wireless 2.4 GHz (5 GHz Optional) Wired LAN
Communications Range	Wireless 50 m or up to 400 m with interface* (using 2.4 GHz) Wired option 50 m to 200 m
Image Transfer	Wired - 5 seconds Wireless - 9 seconds**
X-ray Energy Range	40 - 330 kV
Weight	7.3 lb (3.3 kg)
Dimensions (Panel)	15.2" x 12.6" x 0.7" 38.5 x 32.0 x 1.8 cm
Power	100-240 VAC (50-60 Hz), 2A using included power supply 14.4 V, 93 Wh, Li-Ion hot-swappable battery pack
Operating Temperature	-4° to 122°F (Wired), 32° to 104°F (Wireless) -20 to 50 C 0 to 40 C
Storage Temperature	-4° to 122° F -20 to 50 C
PC Specs (Minimum)	Core i7 Processor, 4 GB RAM, 500 GB hard disk, 14" 1600 x 900 display, Windows 7 Professional

* Line of Sight

** Estimated